

# Mistrale Natural Ventilation



## Model E

### Exhaust unit without Heating Coil

Model E is primarily intended for installation at high wall or stack level to provide an external outlet for the warm stale exhaust air. Depending on the functional area units may require an insulated damper or non insulated blade damper. With no air tempering requirements in these areas no heating/cooling coil options are available.

A typical arrangement (as illustration) comprises

- External Louvre - Standard high efficiency weather louvre with choice of flange, channel or window beading fixing frame options.
- Volume Control Damper - Volume control damper may be insulated or un-insulated and with Manual or Motor control.

### Size Range

Effective damper size (internal blade area).

Width - 300 up to 2000 in 100mm increments.

Height - 206 up to 1006 in 100mm increments.

### Structural opening sizes

Damper width +200mm

Damper height +110mm

### External Louvre



Both the external louvre and the fascia grille finished to standard BS/RAL colours.

Dim 'A' WG/100 - 121mm

WH/75 - 121mm

WG/75 - 72mm

WG/38 - 50mm

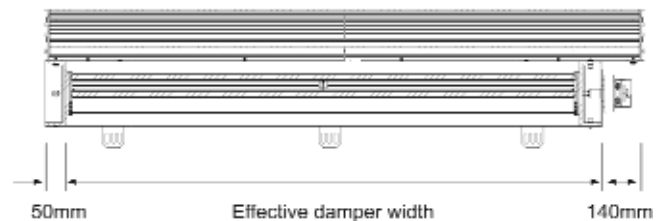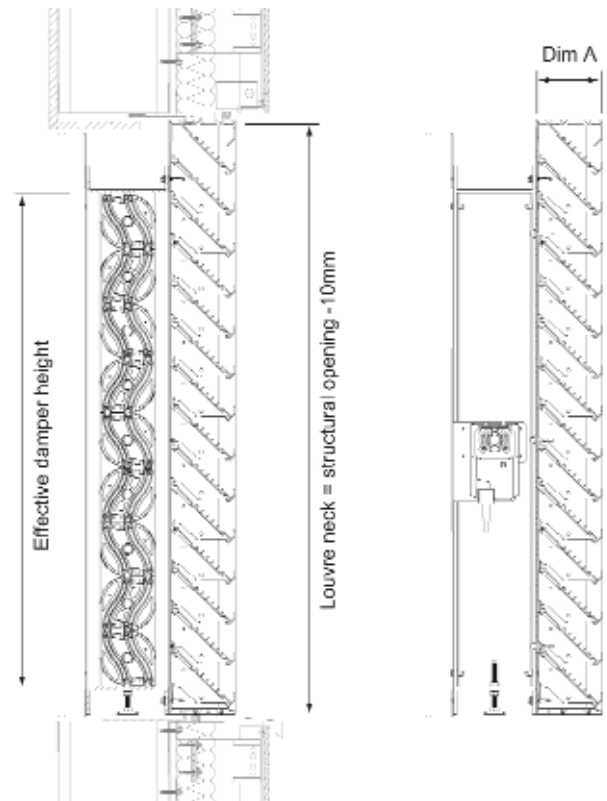

### Fixing Options

